

USER MANAUL

Panel RGB controller



TECHNICAL SPECIFICATION:

Family Name:TOUCH-RGB/TOUCH

Operating Voltage:DC 12/24V

Output Power:144W/288W

Output: 3 Channels

Output Current:<4A – CH/<4A Each – CH

Connection Mode:Common Anode

Static Power Consumption:<1W

Working Temperature:-20/+60C

Class of Protection:III

Degree of Protection:IP20

RGB

Static color:16 million colors with color ring

Brightness:1%~100%

White:Mix White (Red, Green, Blue light on together)

Dynamic modes:

1.RGB Strobe

2.RGB Fade

3.7 Colors Strobe

4.7 Colors Flash

5.7 Colors Fade in&out

6.7 Colors Fade

7.White Fade in&out

8.Red Fade in&out + flash 3 times

9.Green Fade in&out + flash 3 times

10.Blue Fade in&out + flash 3 times


11.White Fade in&out + flash 3 times

12.Auto-cycle

CONTROL METHOD

	Touch this button to turn on/off
	Touch the ring to adjust brightness in DIM situation, adjust color in RGB situation
	Touch this button for DIM situation
	Touch this button for RGB situation
	Touch this button for dynamic modes select
	Touch this button for dynamic mode speed reduce
	Touch this button for dynamic mode speed increase
	Touch this button to select white color

TOUCH PANEL GUIDANCE

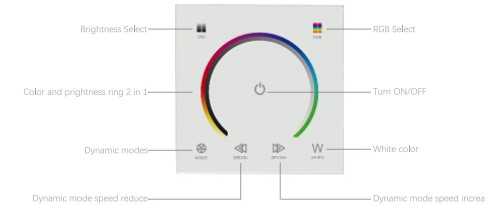

DIAGRAM

